

ICE0320/0325 - Cube Ice Maker



Features

• Produces up to 349 lbs (159 kg) of ice per day.

۲

- *Harvest Assist* provides consistent ice production for the life of the ice maker while reducing energy consumption and increasing capacity.
- *Pure Ice*[®] exclusively by Ice-O-Matic. Built-in antimicrobial protection for the life of the ice maker inhibits bacteria growth on ice maker surfaces. Ice-O-Matic's optional water filtration system provides protection against unpleasant tastes, odors and scale formation.
- Durable, electroless nickel plating on all evaporator plates ensures reliability.
- Longest warranty in the industry. Purchase an Ice-O-Matic water filter with your cube ice maker, replace the filter every six months, and the evaporator warranty is extended to 7 years parts and labor (available in the U.S. and Canada only).
- Constructed from corrosion-resistant stainless steel and fingerprint-proof plastic.
- Space saving 22" (558 mm) wide design.

Options & Accessories

I

()

Water Filters								
lce Machine Model		Inline						
	System	Replacement	System					
ICE0320	IFQ1	IOMQ (1)	IFI4C / IFI8C					
ICE0325	IFQ1	IOMQ (1)	IFI4C / IFI8C					

Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

- Three years Parts and Labor.
- ${\boldsymbol{\cdot}}$ Five years ${\boldsymbol{Parts}}$ coverage on the evaporator and compressor.
- Seven years **Parts** and **Labor** on the evaporator when you purchase an Ice-O-Matic water filter with your cube ice maker and replace the filter every six months (available in the U.S. and Canada only).

Ice Form	Bin Cl Kits for Co	nart mbining Wider	Bins with Sm	aller Models							
		Ice Storage Bins									
		Model No. Capacity Width	B25 255 lbs (116 kg) 30 in (762 mm).	B40 365 lbs (165 kg) 30 in (762 mm)	B42 374 lbs (170 kg) 22in (559 mm)	B55 556 lbs (252 kg) 30 in (762 mm)	B100 927 lbs (420 kg) 48 in (1219 mm)	B120 1193 lbs (541 kg) 48 in (1219 mm)	B150 1499 lbs (679 kg) 60 in (1524 mm)	B170 1866 lbs (846 kg) 60 in (1524 mm)	
CUBEDICE Full Cube Wx D x H (in) 7/4 x 7/4 x 7/4	Kits	ICE0320	KBT 19	KBT 19	Kit not required	KBT 19	N/A	N/A	N/A	N/A	
W x D x H (m) 75 x 75 x 75 W x D x H (mm) 22 x 22 x 22 Half Cube W x D x H (in) 76 x 76 x 36	Ř	ICE0325	KBT 19	KBT 19	Kit not required	KBT 19	N/A	N/A	N/A	N/A	
W x D x H (mm) 22 x 22 x 10			* See Ici	e-O-Matic Price	e List for Adapt	er Kits to comb	ine ice makers	with most ava	ilable ice/bever	rage dispensers	
	Que o	Matic	Enodis			TUV BRAVICE		Ŧ.			
	ISO 9001	-Matic Certified	enerlogic				PERFORMA CERTI	INCE FIED	F SI.		

11100 E. 45th Avenue Denver, CO 80239
 Phone:
 303.371.3737

 Fax:
 303.371.6296

 www.iceomatic.com


Rev: A-05/08 Part: 1004

Enodis

()

۲



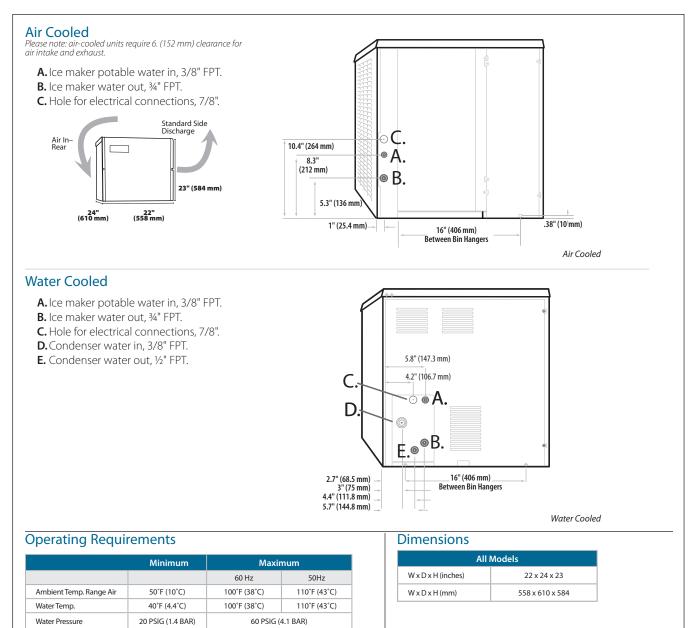

۲

Specifications

Model Number	Cond. Unit	Ice Production per 24hrs		Water Usage gallons per 100 lbs of Ice 90°F air/70°F water		kWH Used per 100 lbs				
		70°F air/ 50°F water Ibs (kg)	90°F air/ 70°F water Ibs (kg)	Potable	Condenser	of ice @ 90°F air/ 70°F water	Voltage Characteristics	Min. Circuit Ampacity	Fuse Size	Approx. BTUs per hour
ICE0320A	Air	334 (152)	249 (113)	26.9	-	8.1	115/60/1	13.8	15	6,228
ICE0320W	Water	349 (159)	308 (140)	27.3	157	5.3	115/60/1	10.9	15	6,115
ICE0325A	Air	301 (137)	214 (97)	28.3	-	7.2	220-240/50/1	6.6	16	4,990

NOTES:

Number of Wires:

Approx. Shipping Weight lbs (kg):

Refrigerant Type:

3 (including ground) ICE0320A 150 (68) • ICE0320W 160 (73) • ICE0325A 150 (68) R404A

11100 E. 45th Avenue Denver, CO 80239

303. 371.3737 Phone: Fax: 303.371.6296 www.iceomatic.com

A-05/08 Part: 1004

Enodis

۲

۲

۲

Rev: